

AUG 06 2002
PATENT & TRADEMARK OFFICE 94CA

FIG. 5


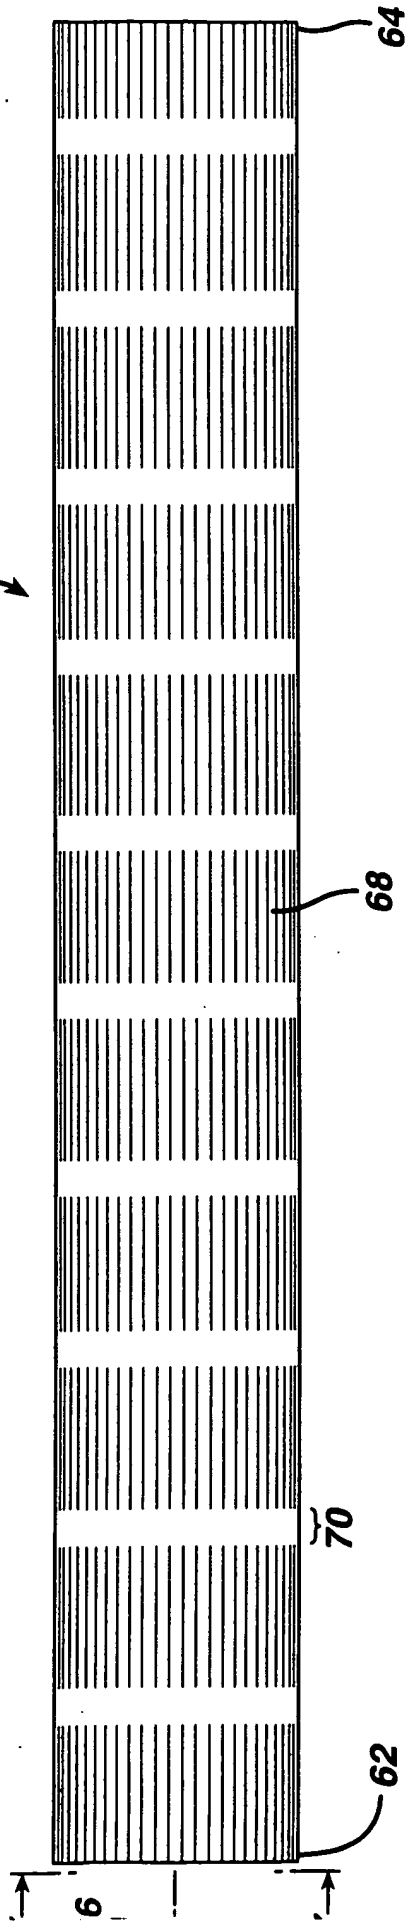


FIG. 6



COPY OF PAPERS
ORIGINALLY FILED

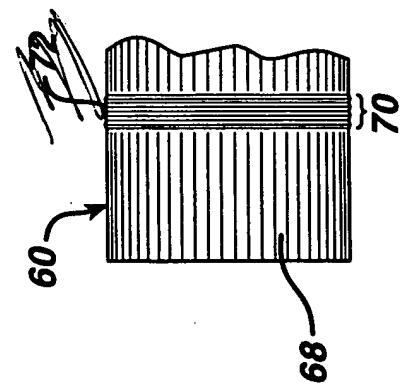

COPY OF PAPERS
ORIGINALLY FILED

FIG. 8


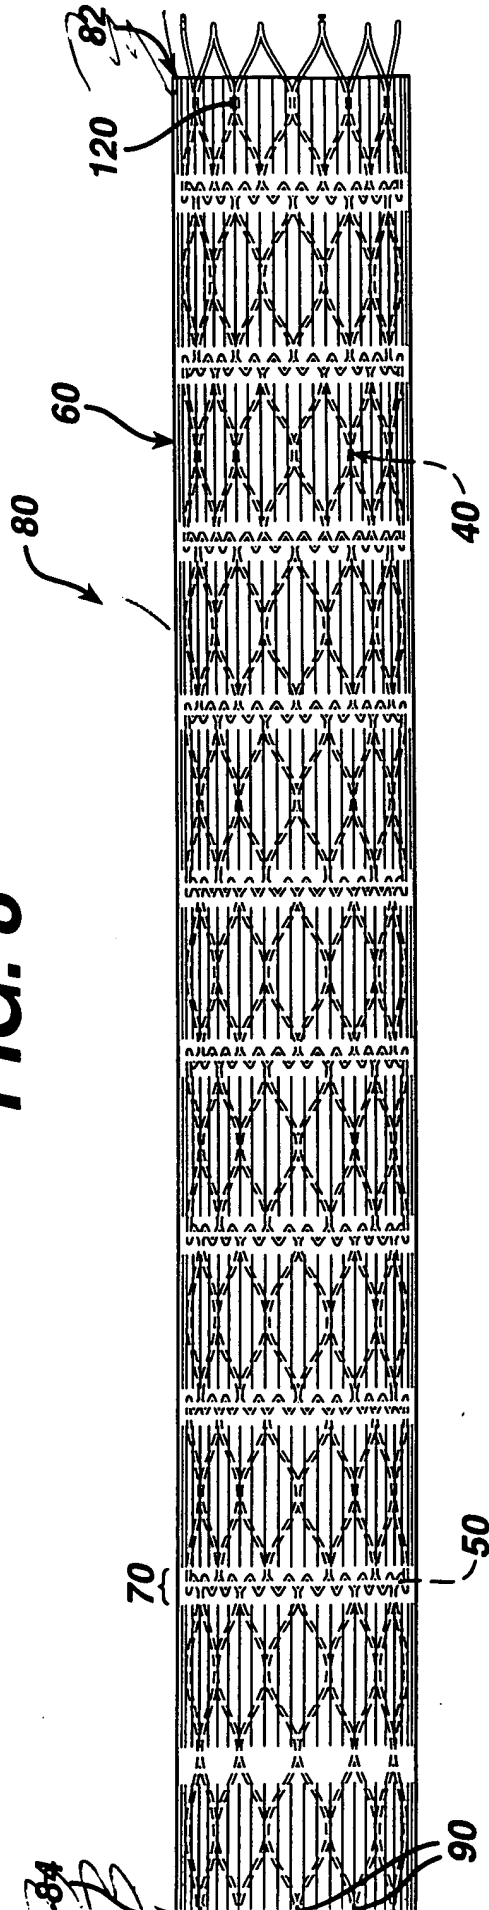




FIG. 16

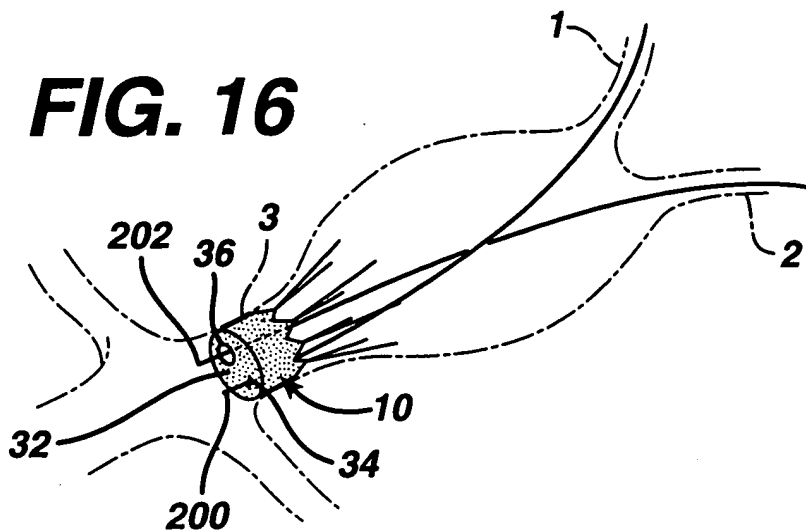

COPY OF PAPERS
ORIGINALLY FILED

FIG. 17

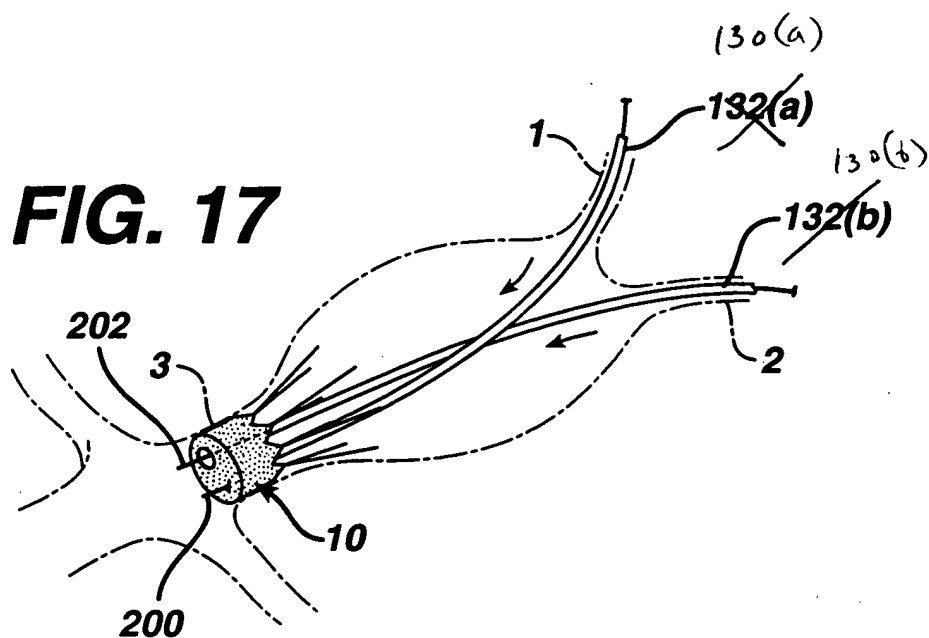


FIG. 18


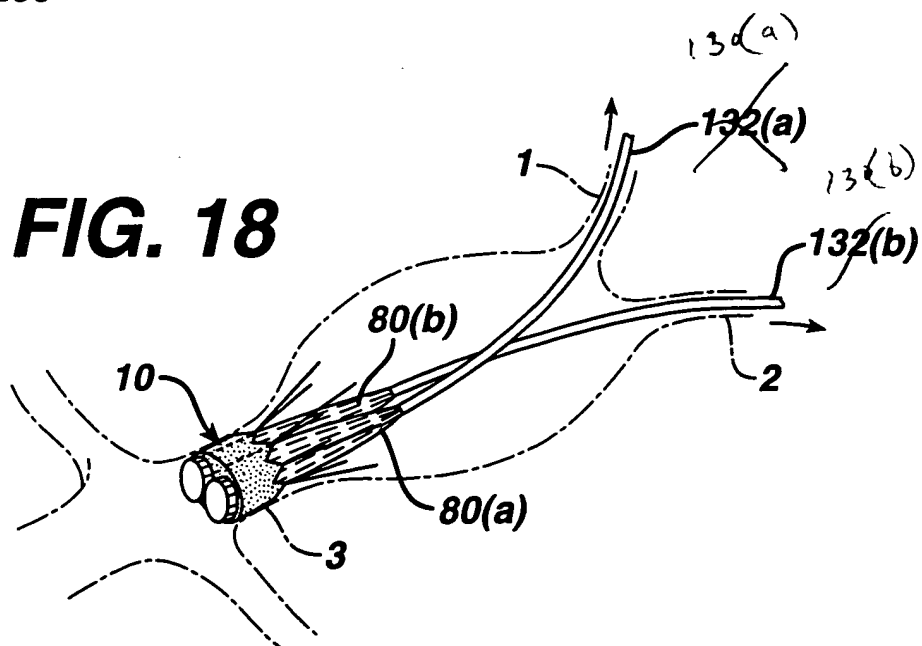


FIG. 19



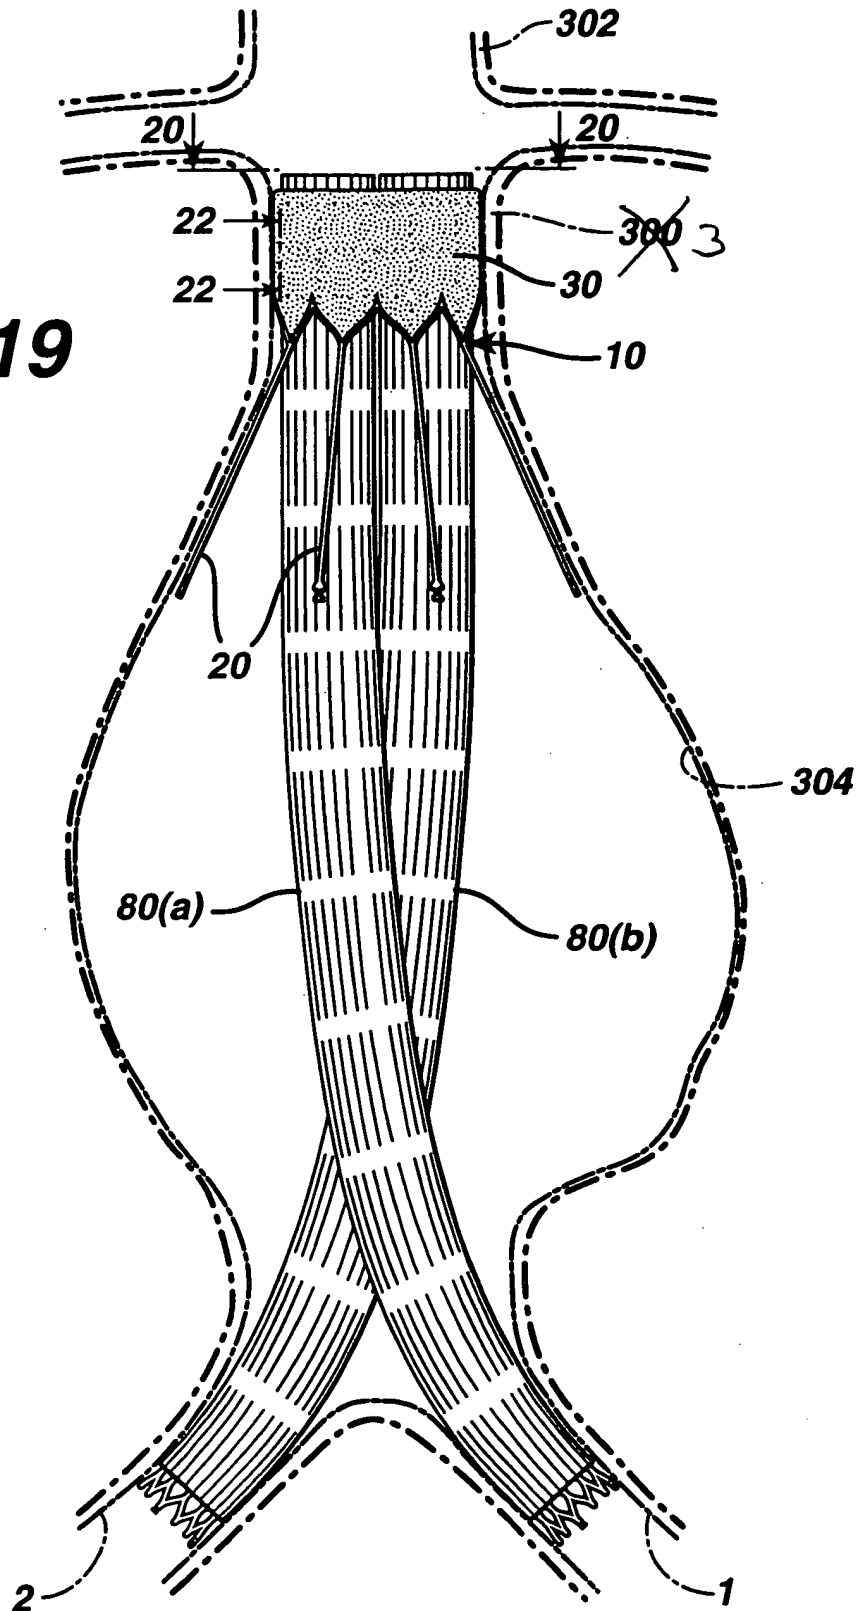

COPY OF PAPERS
ORIGINALLY FILED

FIG. 20


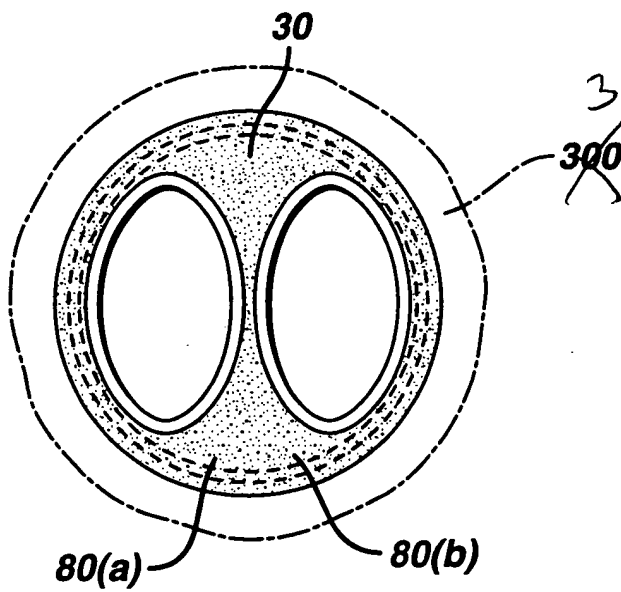




FIG. 23



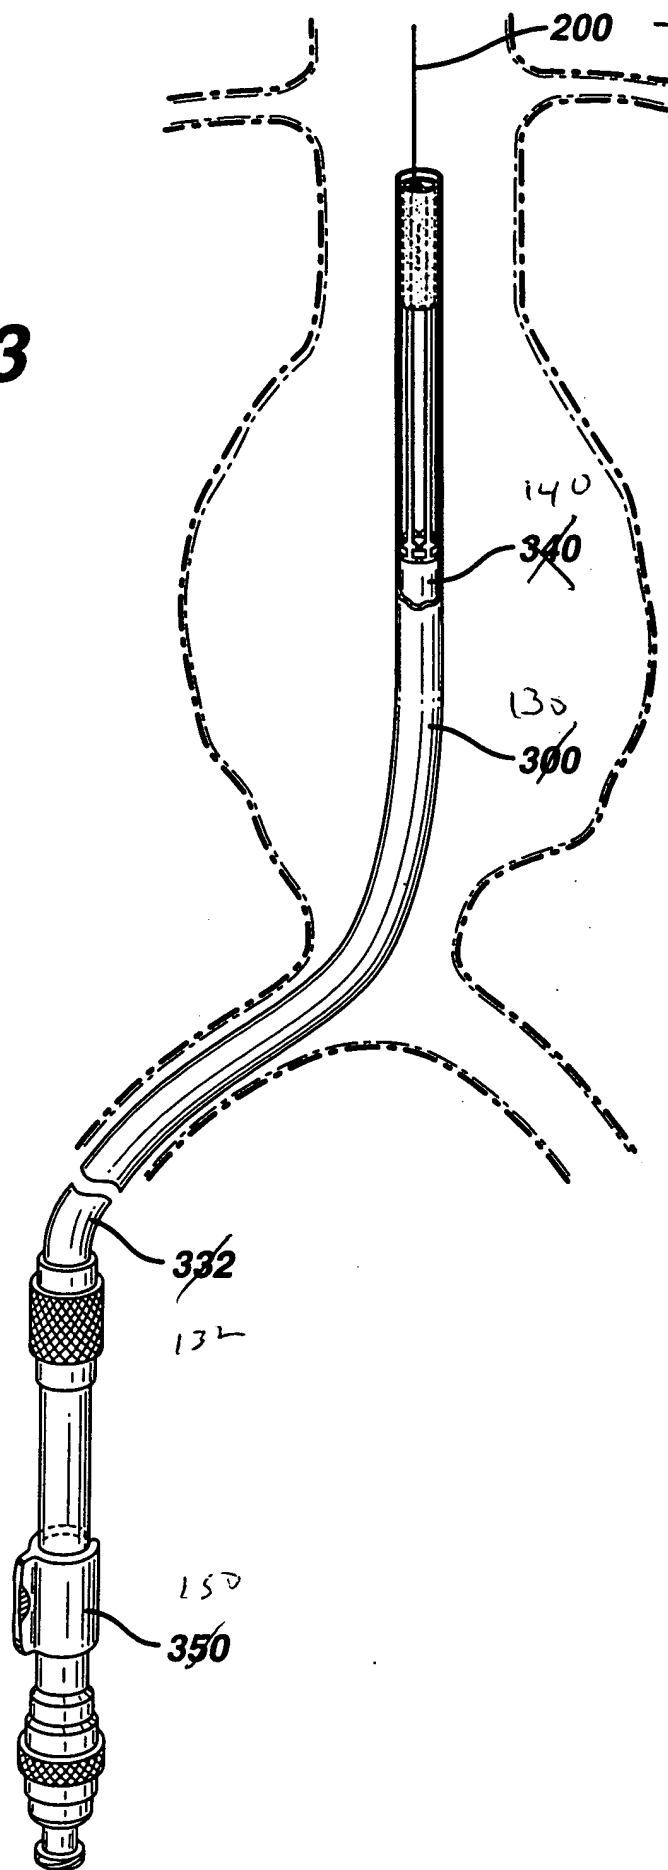

COPY OF PAPERS
ORIGINALLY FILED


FIG. 24

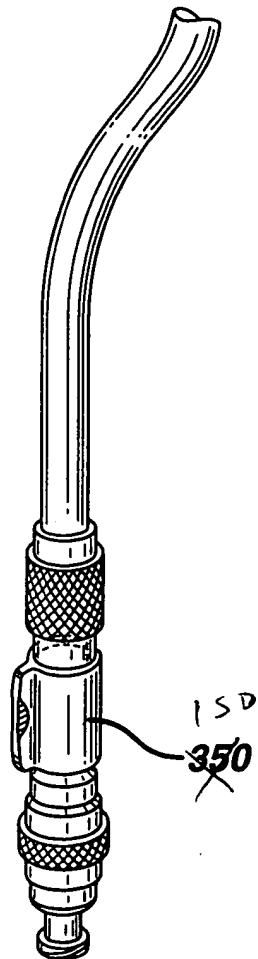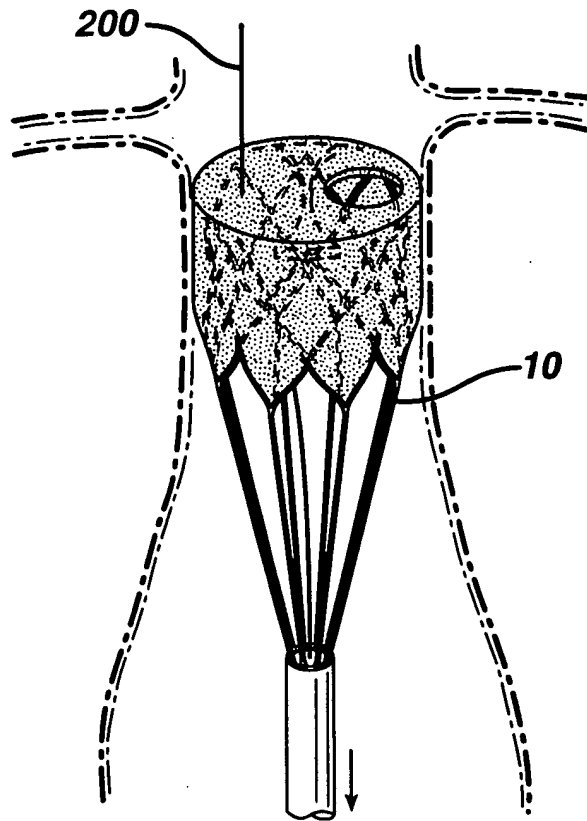



COPY OF PAPERS
ORIGINALLY FILED


FIG. 25

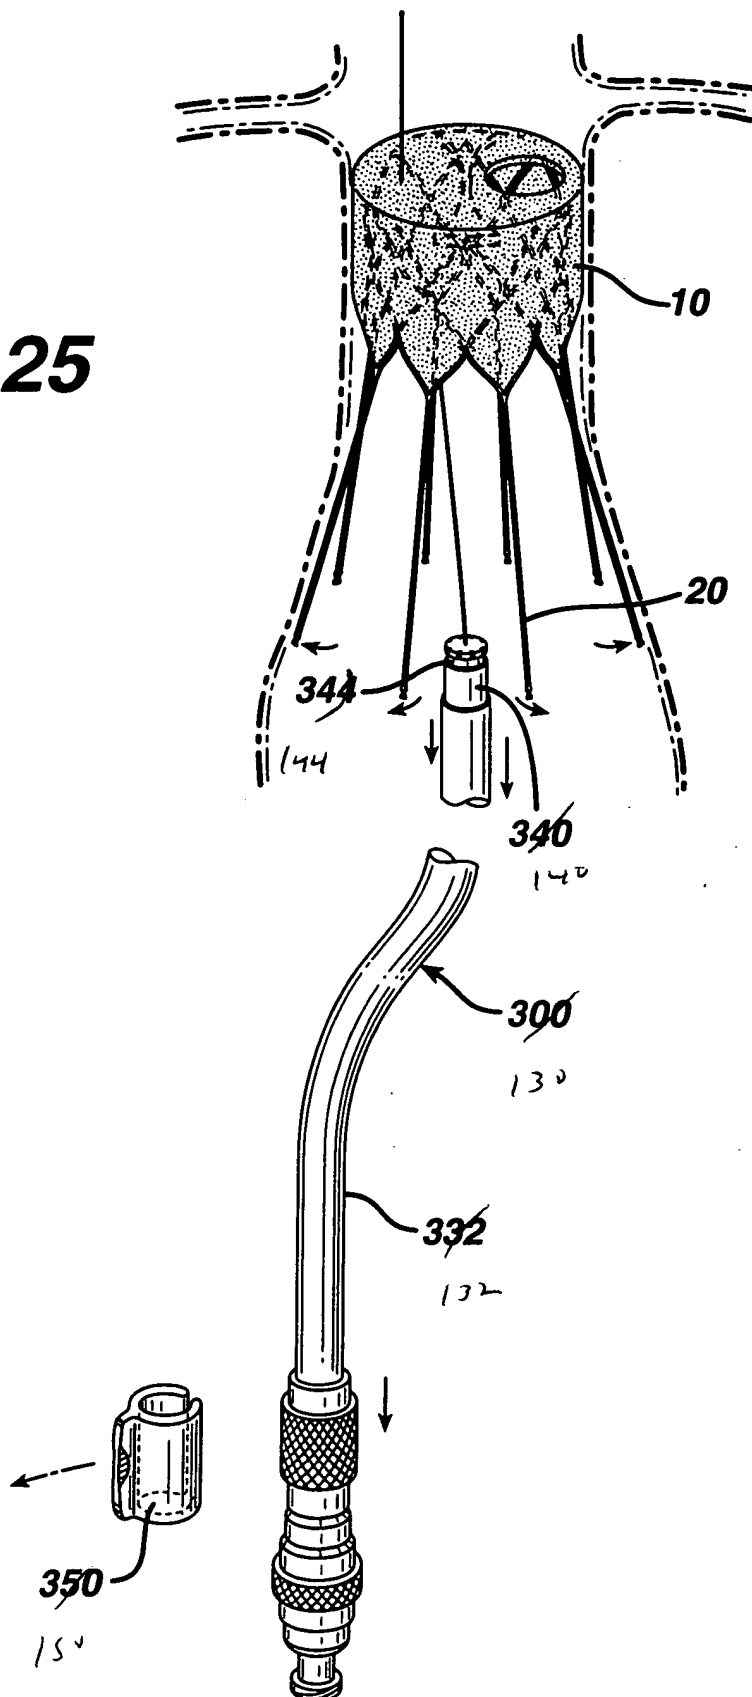



COPY OF PAPERS
ORIGINALLY FILED

FIG. 26

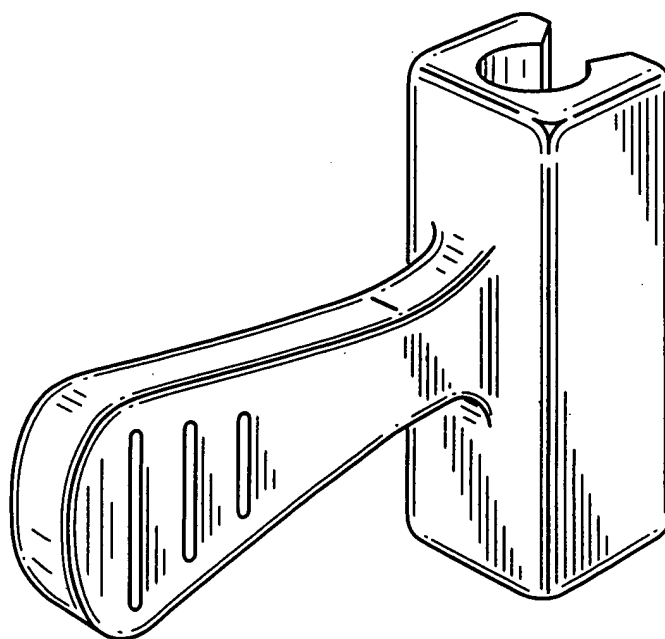

350
150

An arrow originates from the text "350" and "150" and points towards the curved arm of the component shown in FIG. 26. The number "350" is positioned above the number "150".